



Round Ceiling Baffle

for 8" Speakers

Screw Speaker Mount – **Model LS8W**

Stud Speaker Mount – **Model ES8W**

MODELS LS8W & ES8W

- Flush mount, cost effective 8" speaker baffle.
- Large 12-1/2" diameter.
- Ceiling white, non-glare texture blends with ceiling materials.
- Manufactured of UV stabilized, high impact polystyrene thermoplastic.
- Paintable and non-corroding.
- Injection molded in Fourjay's plant for quality assurance.
- 11-1/4" diameter circle mounting pattern for use with toggle-bolts, wood screws or most metal rings, bridges and enclosures.
- Mount to Fourjay bridges TB8(X) and PB8.



◀ MODEL LS8W

- Four mounting holes on 7-5/8" diameter circle to mount 8" speaker.
- Accommodates thick-gasketed foreground music speakers and standard background music speakers.
- Matching whitehead screws and hex-nuts furnished; phillips head screws for electric drivers.
- Accepts Model D8W sound diffuser to eliminate "hot spots." (See Form 447).

MODEL ES8W ▶

- Easy-On studs for mounting 8" speaker in seconds. Just place the speaker on the mounting studs, then push on the supplied push-on nuts. No tools required.
- Only four screw heads on face of baffle.
- Matching whitehead screws and hex-nuts furnished; phillips head screws for electric drivers.




FOURJAY SINCE 1956
INDUSTRIES, INC.

2801 ONTARIO AVE. • DAYTON, OH 45414 TELEPHONE (937) 890-6444 •
FAX (800) 4J HORNS (454-6767) WEBSITE : <http://www.fourjay.com> •
EMAIL: 4j@fourjay.com

Fourjay Quality—American Made

PRODUCT SPECIFICATIONS

	Model LS8W	Model ES8W
Material	UV stabilized, high impact polystyrene	
Color	Ceiling white (paintable)	
Speaker Size	8" (7-5/8" diameter mounting centers)	
Baffle Mounting Fasteners	Four #8 x 1-1/2" phillips truss-whitehead sheet metal screws	
Speaker Mounting Fasteners	Four #8-32 x 1" phillips truss-whitehead machine screws and four #8-32 hex-nuts	Four push-on spring nuts
Standard Package	20 units	
Mounting Devices	11-1/4" diameter circle mounting pattern; Model TB8(X) and PB8, other metal rings, bridges and enclosures	

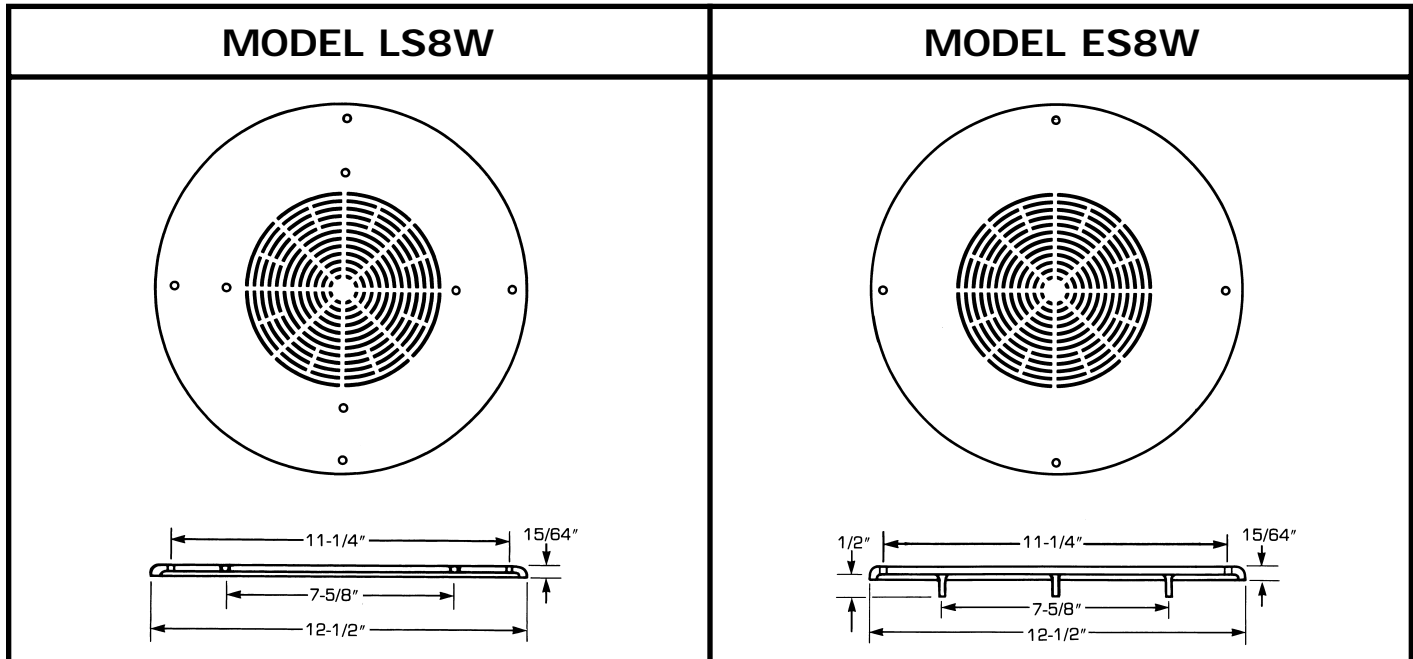

ARCHITECT'S & ENGINEER'S SPECIFICATIONS

Round baffle for 8" speaker shall be Fourjay Model LS8W with outside diameter of 12-1/2". It shall have four mounting holes on 11-1/4" diameter circle and four speaker mounting holes on 7-5/8" diameter circle to accept most 8" speakers. The baffle shall be constructed of ceiling white, UV stabilized, high impact polystyrene thermoplastic which is paintable. Furnished with four #8-32 x 1 truss-whitehead machine screws and four #8-32 hex nuts to securely fasten speaker to baffle; and four #8 x 1-1/2" truss-whitehead sheet metal screws to fasten baffle to ceiling/wall. Fourjay Model D8W sound diffuser may be mounted to baffle to reduce hot spots.

Round baffle for 8" speaker shall be Fourjay Model ES8W with outside diameter of 12-1/2". It shall have four mounting holes on 11-1/4" diameter circle and four studs on 7-5/8" diameter circle to accept most 8" speakers. The baffle shall be constructed of ceiling white, UV stabilized, high impact polystyrene thermoplastic which is paintable. Furnished with four push-on nuts to securely fasten speaker to baffle, and four #8 x 1-1/2" truss-whitehead sheet metal screws to fasten baffle to ceiling/wall.



FOURJAY SINCE 1956
INDUSTRIES, INC.

2801 ONTARIO AVE. • DAYTON, OH 45414 TELEPHONE (937) 890-6444
• FAX (800) 4J HORNS (454-6767) WEBSITE: <http://www.fourjay.com> •
EMAIL: 4j@fourjay.com

Fourjay Quality—American Made